



TOYOTA

TECHNICAL SERVICE BULLETIN

REF.: AUDIO

NO.: AU002-96

DATE: OCTOBER 25, 1996

MODEL: ALL MODELS

AM STATIC NOISE ON VEHICLES WITH POWER ANTENNAS

Page 1 of 2

Vehicles with power antennas may exhibit audible electrical noise on weak AM stations when various electrical accessories (turn signals, rear defogger, cruise control, brakes, etc.) are operated.

Poor antenna grounding can cause this condition.

To eliminate or reduce the intensity of the noise, use the following repair procedure:

REPAIR PROCEDURE:

1. Tune the radio to a strong, static-free AM station and slowly move the tip of the antenna mast forward and back approximately 2 inches (Fig. 1). If static noise is not heard, go to Step 2. If static noise is heard during antenna movement, replace the antenna mast and go to Step 3.

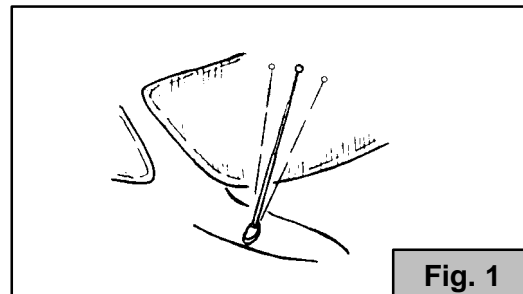


Fig. 1

NOTE: Do not touch the antenna mast with your bare hands. Use a glove or nonmetallic object to move the antenna. (If you touch the antenna with your hands, you will change the antenna sensitivity).

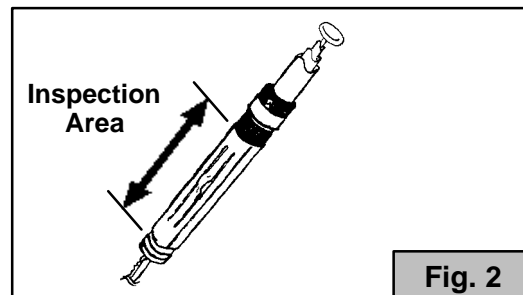


Fig. 2

2. Remove the antenna mast and inspect the base of the mast for corrosion and damage (Fig. 2). Clean with 1500 grit sandpaper.
3. Remove the antenna assembly and inspect the inner fender around the antenna hole for corrosion (Fig. 3). Clean with 1500 grit sandpaper.


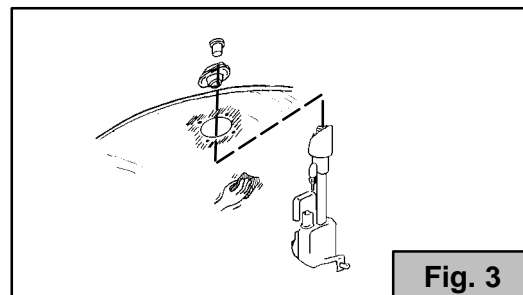



Fig. 3

REPAIR PROCEDURE (Cont'd):


4. Remove the antenna spacer grommet at the top of the antenna assembly and inspect for corrosion (Fig. 4). Clean with 1500 grit sandpaper.

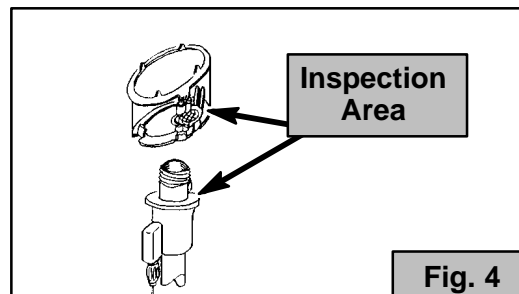


5. Reinstall the antenna assembly. Be sure to install the external antenna nut (escutcheon) first. Then install the nut which holds the assembly to the inner bracket (Fig. 5).

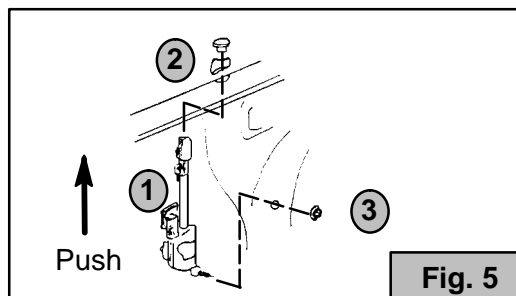

6. Check to make sure that the teeth on the antenna spacer grommet make good contact with the inner fender well (Fig. 6).

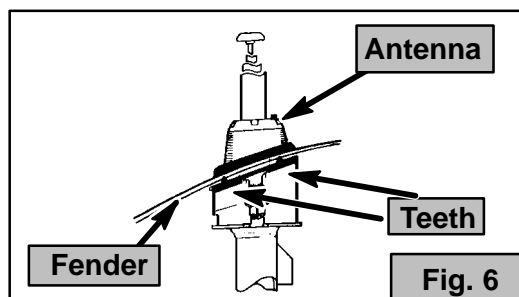

7. Inspect the antenna cable connection and clean as necessary (Fig. 7). Reconnect the antenna cable, the wire harness and the drain hose.

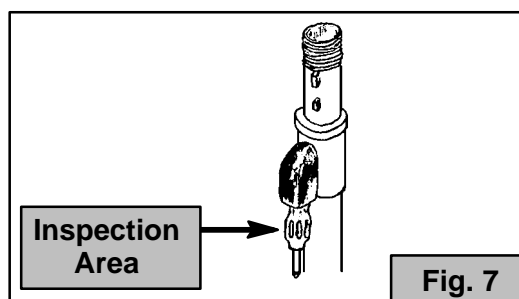**WARRANTY INFORMATION:**

OPCODE	DESCRIPTION	TIME	OPN	T1	T2
AU6001	Listed repair procedure (All items)	1.0	86300-XXXXX	76	73